


KSOB-08G 固体润滑轴承规格及公差 KSOB-08G Solid-lubricant Bushing Specification & Tolerance

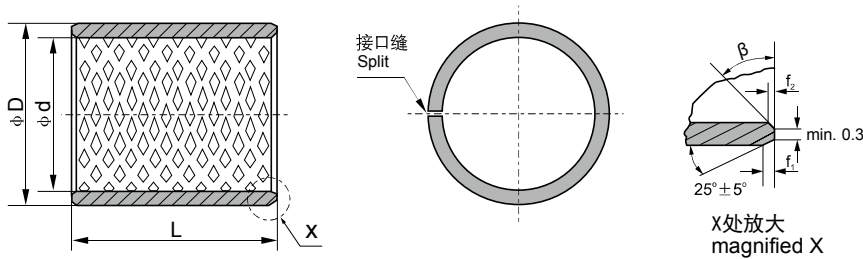

单位 Unit: mm

d	D	f ₁	f ₂	L ⁰ _{-0.40}																
				10	15	20	25	30	35	40	50	60	70	80	90	100				
10	12	0.3	0.5	1010	1015	1020														
12	14			1210	1215	1220														
14	16			1410	1415	1420	1425													
15	17			1510	1515	1520	1525													
16	18			1610	1615	1620	1625													
18	20			1810	1815	1820	1825													
20	23	0.8	0.4	2010	2015	2020	2025													
22	25			2210	2215	2220	2225	2230												
24	27				2415	2420	2425	2430												
25	28				2515	2520	2525	2530												
28	32				2815	2820	2825	2830												
30	34			1.0	0.6		3015	3020	3025	3030	3035	3040								
32	36		3215			3220	3225	3230	3235	3240										
35	39					3515	3520	3525	3530	3535	3540									
40	44						4020	4025	4030	4035	4040	4050								
45	50	1.2	0.6					4520	4525	4530	4535	4540	4550							
50	55							5020	5025	5030	5035	5040	5050	5060						
55	60					5520	5525	5530	5535	5540	5550	5560								
60	65						6025	6030	6035	6040	6050	6060	6070							
65	70							6530	6535	6540	6550	6560	6570							
70	75							7030	7035	7040	7050	7060	7070	7080						
75	80	1.4	0.8				7530	7535	7540	7550	7560	7570	7580							
80	85							8030	8035	8040	8050	8060	8070	8080						
85	90									8540	8550	8560	8570	8580	8590					
90	95									9040	9050	9060	9070	9080	9090					
95	100										9550	9560	9570	9580	9590	95100				
100	105											10050	10060	10070	10080	10090	100100			
105	110									10550	10560	10570	10580	10590	105100					
110	115									11050	11060	11070	11080	11090	110100					
115	120									11550	11560	11570	11580	11590	115100					
120	125										12060	12070	12080	12090	120100					
125	130											12560	12570	12580	12590	125100				
130	135												13060	13070	13080	13090	130100			
135	140													13560	13570	13580	13590	135100		
140	145														14060	14070	14080	140100		
145	150															14560	14570	145100		
150	155																15060	150100		
155	160																	155100		
160	165																	160100		